



ECOstars[™]




Make your space come alive with ECOstars! Brilliant color and sustainable content have combined to bring you beautiful and environmentally supportive design. For applications in need of intensified color and renewable composition, whether a professional office space or an athletic retail shop, ECOstars has a solution to fit.

Choose from 8 color patterns that deliver superior durability and sleek professionalism to any application. Promoting stunning visual possibilities and contemporary design with increased color concentrations, ECOstars can also contribute up to nine points toward LEED certification. With unparalleled standard qualities and versatile design capabilities, the ECOstars collection is an ideal option for countless varieties of surfacing needs.

Various Dimensions

Rolls	48" x 1/8" (3.2 mm standard)
	48" x 1/4" (6 mm special- 5,000 sq.ft. min.)
	Standard 50' rolls
Tiles	36" x 36"
	18" x 18"
	Available in 1/8" (3.2 mm) standard; 1/4" (6 mm) special



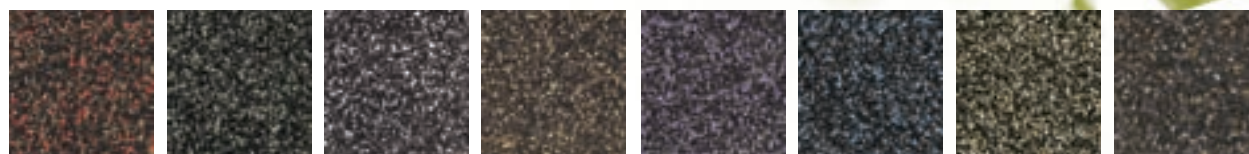

1102 - Mars Attacks! 1105 - Space Invaders 1100 - Star Search 1101 - Lost In Space 1103 - Jefferson Starship 1104 - Starway to Heaven 1107 - Spaceballs 1106 - Space Cadet

Colors may vary. Specify from actual samples obtained from your local sales representative or Gerbert, Ltd. at 1-877-326-7873.

Physical Data

Test	ASTM	Result
Tensile Strength	D412	200 lb/in ² min
Flexibility	F137	Pass 1/4 inch mandrel
Coefficient of Friction	D2047	>0.6
Thermal Conductivity	C518	0.445 Btu-in/hr-ft ² -°F
Static Load Limit	F970, 400 lbs	<0.005 in.
Chemical Resistance	F925	slight change
Impact Insulation Class	E492	48
Sound Transmission Coefficient	E413	51
Noise Reduction Coefficient	C423	0.05 sabine/ft ²
Sustainability	E2129-01	data collected
CHPS Section 01350	D5116	pass

Brief Architectural Specs

ECOsurfaces Commercial Recycled Rubber Flooring:

The single-ply, rubber surface furnished under this specification shall be ECORE's _____ (specify one of the ECOsurfaces products listed below).

ECOstars is a non-laminated, single-ply surface made from bit-sized reprocessed EPDM rubber. The color shall be (specify: color number and name).

ECOsurfaces rolled products shall be 4' wide. The rolled rubber surface will have an overall thickness of _____ (specify: 1/8" [3.2 mm] standard, 1/4" [6 mm] special order - 5000 sq. ft. min.).

ECOsurfaces tile products shall be _____ (specify: 18" x 18" or 36" x 36" and thickness of 1/8" [3.2 mm] or 1/4" [6 mm]).

ECOsurfaces shall meet standards specified under the LEED® (Leadership in Energy and Environmental Design) criteria developed by the U.S. Green Building Council (USGBC). For the ECORE International™ warranty to apply, only use recommended adhesive and follow all ECORE approved installation and maintenance procedures. The rubber flooring shall comply with the Americans with Disabilities Act (ADA) regulations.

Technical Data: For complete guide specifications visit www.ecosurfaces.com or call 877.326.7873

Installation

Basic installation procedures and tools are the same as other standard commercial resilient flooring. ECOsurfaces should be installed by experienced floor covering mechanics. Instructions in the ECOsurfaces installation manual should be followed and are available at www.ecosurfaces.com or through your ECOsurfaces representative.

Cleaning & Maintenance

All ECOsurfaces flooring systems must be maintained as recommended. The type and frequency of maintenance will vary according to maintenance equipment and desired appearance of product. Detailed maintenance instructions are available at www.ecosurfaces.com or through your ECOsurfaces representative.

Warranty

ECOsurfaces is guaranteed by ECORE to be free of manufacturing defects in both material and workmanship. If such a defect is discovered, the customer must notify ECORE directly or through the contracting installer or distributor. If found to be defective within five years, the sole remedy against the seller will be either the replacement or repair of the defective goods, or at the seller's option, credit may be issued not exceeding the selling price of the defective goods. The ECOsurfaces warranty shall not cover dissatisfaction due to improper maintenance or installation, damage from improper maintenance or usage or general misuse, including, without limitation, burns, cuts, tears, scratches, scuffs, indentation damage from high heels, rolling loads, damage or discoloration from floor care products not recommended by either Gerbert Ltd. or ECORE, initial or extended exposure to direct sunlight or differences in color between samples or photographs and actual flooring.



Distributed by:
Gerbert, Ltd.
1.877.326.7873
www.ecosurfaces.com

