



1" thickness

ECOmax[®]



2-1/2" thickness

TECHNICAL MANUAL
Installation • Maintenance • Warranty

www.ecosurfaces.com • 1-877-326-7873

Warranty updated on 11/21/11. Supersedes all previous versions. Check website for updates.

TABLE OF CONTENTS

1" AND 2-1/2" BASE PREPARATION		3-5
1" & 2-1/2"	Recommended Installation Methods	3
	Tools/Materials Required	3
	Site Work	4
	Base Options	4-5
1" INTERIOR INSTALLATION		6-8
1"	General Information	6
	Site Layout	6
	Laying Tile for Starter Course	7
	Laying Tile for Second and Subsequent Tile Courses	7
	Fitting the Outer Course Tile	7
	Adhering the Outer Course and Ramps	7-8
1" EXTERIOR INSTALLATION		9-10
1"	General Information	9
	Site Layout- Fully Adhered	9
	Adhering Tiles to Base	9
	Cutting 1" ECOMax Tile and Ramps	10
2-1/2" INTERIOR AND EXTERIOR INSTALLATION		11-14
2-1/2"	General Information	11
	Site Layout	11
	Fully Adhered Installation	11-12
	Quad Blok Installation	12-13
	Cutting 2-1/2" ECOMax Tile and Ramps	13-14
MAINTENANCE		15-17
	Floor Protection	15
	Assignment of Cleaning & Maintenance	15
	ECORE Cleaning Chart	16
	Indoor Maintenance	16-17
	Outdoor Maintenance	17
WARRANTY		18

1" AND 2-1/2" BASE PREPARATION

I. RECOMMENDED INSTALLATION METHODS FOR 1" AND 2-1/2"

INTERIOR INSTALLATION						EXTERIOR INSTALLATION					
		24" x 24" x 1"		24" x 24" x 2-1/2"				24" x 24" x 1"		24" x 24" x 2-1/2"	
Surface	Dowels	Full Glue	Quad Blok	Full Glue		Surface	Dowels	Full Glue	Quad Blok	Full Glue	
Concrete	☐	Δ	☐	☐		Concrete	N/A	☐	Δ	☐	
Asphalt	☐	Δ	☐	☐		Asphalt	N/A	☐	Δ	☐	
Plywood	☐	☐	☐	☐		Compact Gravel ¹	N/A	N/A	☐	Δ	
Compact Gravel ¹	N/A	N/A	☐	Δ		Wood or Tile	N/A	☐	Δ	☐	
Wood or Tile	☐	N/A	☐	N/A		Resilient Flooring	N/A	☐	Δ	☐	
Resilient Flooring	☐	N/A	☐	N/A		Indoor/Outdoor Carpet	N/A	N/A	Δ	☐	
Carpet	☐	N/A	☐	N/A		Rooftops	N/A	N/A	☐	N/A	
☐ = RECOMMENDED					N/A = NOT AN APPROVED INSTALLATION METHOD					Δ = ACCEPTABLE	

1. Geo-textile fabric must be used over Compact Gravel

II. TOOLS/MATERIALS REQUIRED

1. Two tape measures - 25' and 50'
2. Chalk line
3. Saber saw (Jig saw)
4. Blades for saber saw (7-10 teeth per inch, wood type)
5. Utility knife with heavy-duty blades
6. Framing square/metal straightedge
7. Silver or gold color paint pencils
8. Standard size caulk gun
9. 4" slot blade screwdriver
10. Notched trowels -1/8" square notch [outdoor] or 1/16" square notch [indoor]; 2 minimum plus 1 for each additional 400 sq. ft.
11. Safety glasses
12. 1-1/2" flexible putty knife
13. Coveralls
14. Kneepads
15. Solvent safe rubber gloves, long cuff style
16. Rags
17. Trash bags
18. Push broom or high velocity blower
19. Mineral spirits to clean mixing blades
20. Installation instructions
21. String line
22. Cutting table (shipping pallet)
23. Dustpan
24. 2-3 lb. hand sledge hammer or rubber mallet

III. SITE WORK

NOTE: Dimensional tolerance for tiles is +/- 1/8." From time to time during installation, it may be necessary to measure and hand select tiles to ensure course lines remain straight. Additionally, color tone and shading may vary to the extent that some hand selection is required to maintain maximum uniformity throughout the site.

A. Site Elevation

1. On grade installation - The finished installed height of the ECOMax surface will be equal to or slightly higher than the perimeter grade, but not more than 1" higher unless approved by the project engineer.
2. Above grade installation - The installation of ECOMax over existing decks or slabs is referred to as "above grade installation" and will usually require the use of reducers around the perimeters of the area to transition smoothly back to the floor elevation, unless the site terminates at a wall or other vertical surface.

B. Site Slope/Drainage

1. When preparing a new hard base, a minimum slope equal to 1" per 10' of run shall be applied to the finished surface with slope toward the drain basin, drain trough, or down grade side of the site- whichever applies to your project.
2. An acceptable drainage system needs to be put in place to eliminate standing water.

IV. BASE OPTIONS

A. Hard Base Construction

1. Concrete Base

- a. The base will be constructed of cast-in-place, non-structure, Class A concrete that will develop a minimum compressive strength of 3,000 PSI after 28 days cure (minimum thickness = 4"). Care should be taken to provide for the stated slope. The base should be free of depressions that would pond water. A light broom finish is best for maximum adhesion of the ECOMax tile. New concrete slabs should cure for a minimum of 28 days before installing ECOMax.

2. Paved Asphalt Base:

- a. Course aggregate mixtures will provide a stable base. The aggregate size best suited for the adhered system is 3/8" to 1/2". Do not use asphalt mixtures that contain a high percentage of fines as they are not stable in hot weather and may become soft enough to allow the tiles to slide in high use areas.
- b. The soil subgrade must be compacted with a minimum of two passes using a 10 ton vibratory roller with no soft or moving areas upon completion. The crushed stone base must also be compacted with a minimum of two passes using a 10 ton vibratory roller. The binder and wear courses of the asphalt must both meet 95% of the theoretical maximum density of the JMF (Job Mix Formula).

Analysis of Asphalt Wear Course

Total Passing Sieve	Percent By Weight
1/2"	100
3/8"	80-100
#4	45-90
#8	30-65
#50	5-25
#200	2-8
Asphalt Cement	6-8

- c. New asphalt surfaces should be allowed to cure for 28 days before the adhered ECOMax system is laid.

B. Preparation of Compacted Loose Base: (2-1/2" ONLY)

1. In outdoor areas or areas with no walls or confines, a perimeter footer will need to be constructed to contain the compacted loose base. The concrete footer is typically 6" x 18" with the top of the footer having a light broom finish.
2. The area inside the footer should be excavated to receive 6" of loose aggregate fill. The amount of excavation and fill can be adjusted to allow the 2-1/2" ECOMax and footer finished surfaces to have the same elevation.
3. By adding fill material and compacting to the top of concrete footer, the 2-1/2" ECOMax tile can be laid over the top of the footer, concealing it if so desired.
4. In all loose base areas, the base should be constructed of 6" of compacted limestone screenings mixture or equivalent aggregate common to your area. A screenings mixture is one having no aggregate larger than 3/8" and should conform to the following sieve analysis.

Loose Aggregate Base Material Limestone Screenings Sieve Analysis (AASHO T10)

Total Passing Sieve	Percent By Weight
3/8"	100
#4	85-100
#100	10-30

5. Once the loose base has been installed and has achieved 95% compaction to the desired elevation, cover the entire area with geo-textile fabric including the top of the footer where the 2-1/2" ECOMax extends over the footer. The minimum infield overlap of successive geo-textile sections is 4". The geo-textile should be adhered to the top of the footer on all sides to anchor the mat and keep it in place throughout the life of the installation.

1" INTERIOR INSTALLATION

I. GENERAL INFORMATION

- A. 1" ECOmax may be installed over most concrete, wood, tile, or carpeted floors. The floor over which 1" ECOmax is installed must be level, in good condition, and clear of dirt and loose debris.
- B. For installations requiring adhesion to concrete, maximum moisture vapor emission of the concrete must not exceed 5.5 lbs. per 1000 sq. ft. in a 24 hour period as measure by the calcium chloride moisture emission test conducted in accordance to ASTM F1869. Moisture can also be measured using the RH Relative Humidity test method per ASTM F2170 standard. Moisture content should not exceed 85% RH. If levels are high using either test method, then one of ECORE's recommended vapor retardants must be used. If the emissions exceed the limitations, the installation should not proceed until the situation has been corrected.
- C. If 1" ECOmax is being installed wall-to-wall, the tile may be doveled together, with the walls serving to contain the outer rows of tile. Tiles which are not contained by walls, either at openings in the wall (i.e. doorways) or freestanding, should be contained by adhering the outer tiles and 1" ECOmax ramps around the outer perimeter. The adhered tile and ramps provide a transition from the 1" thick tile to the original floor level. The perimeter tiles and ramps should be adhered using E-Grip™ III adhesive with a 1/16" square notched trowel indoors over substrate.
- D. Installation should not begin until after all other trades are finished in the area.
- E. Areas to receive flooring should be weather tight and maintained at a minimum uniform temperature of 65°F for 48 hours before, during, and after the installation.
- F. Unpack tiles and allow them to sit in the area to be installed. Tiles and adhesive must be acclimated at a uniform room temperature for a minimum of 48 hours prior to installation.

NOTE: Dimensional tolerance for tiles is +/- 1/8." From time to time during installation, it may be necessary to measure and hand select tiles to assure that course lines remain straight. Additionally, color tone and shading may vary to the extent that some hand selection is required to maintain maximum uniformity throughout the site.

As with any flooring product, dry laying and full inspection of all tiles will allow for a quality installation. Tiles should be inspected from several angles and adjust as necessary.

- A. **NOTE: ECOsurfaces flooring is manufactured from recycled materials and some variance in shade and color chip dispersion is normal. It is the installer's responsibility to inspect all products to ensure the correct style, thickness, and color. Any visual discrepancies should be reported immediately before beginning installation.**

II. SITE LAYOUT

- A. Sweep area clear of all dust and loose debris.
- B. Determine a starting point for the first course of tile to best suit the site area. For irregular site configurations, the best starting point is often in the center. This will ensure a symmetrical finish for tiles that require trimming along the perimeter. Other installations are best started in the corner or along one edge that represents the length or width dimension of the site.
- C. Mark two points on the base surface at an equal distance from the edge of the installation. These points should be located near the opposite ends of the site in the length-wise direction.
- D. Snap a chalk line through the established points.
- E. Measure the length of the site along the chalk line. Mark a point at half the distance of the site.
- F. Using the 3-4-5 right triangle method, snap a chalk line to form a 90° angle to the previously established length-wise chalk line. These perpendicular reference lines will serve as a guide for laying the first course of tile.
- G. Dowel placement - Insert a dowel pin in each of the three dowel holes on two adjacent sides of the tile. Tap the dowel into the molded hole until the length of the dowel is showing beyond the edge of the tile or use a dowel setting tool available from ECORE International™. Install dowels in enough tiles in this manner to lay one course line.

III. LAYING TILE FOR STARTER COURSE

- A. Place the first doweled tile at the intersection of the chalk lines with one doweled side facing inward along the course line.
- B. Join the next tile in the starter course to the original tile by pushing it against the original tile, engaging the dowel holes in the second tile with the dowels in the original tile.
- C. The assembly of tiles using dowels is a two-man job, with one man working always on top of the last tile laid to secure it while the other worker is applying force to the tile being laid.
- D. Continue to assemble tiles in this manner until the row has been completed across the entire course.
- E. A small 2-3 lb. hand sledgehammer may be used to aid assembly by striking the tile close to the doweling point while pressure is applied to the tile in the direction of the doweling by the second workman. A sledge and 2 x 4 may be used to tightly dowel several tiles. These techniques will allow the tile edges to be butted tight together.

IV. LAYING THE SECOND AND SUBSEQUENT TILE COURSES

- A. Place dowels in the tile to be used for the second course as done previously. Join the first tile in the second course to the first tile in the first course.
- B. The second tile in the second course is now ready for placement. This tile will be doweled on two sides. First, dowel the tile to the original tile in the second course, placing the dowels from the first course of tiles above the tile being doweled.
- C. Now dowel the second side of the tile by lifting the tiles to be joined together and inserting one dowel at a time with the appropriate dowel hole.

- D. Continue to assemble tiles in this manner until the row has been completed across the entire course. Complete the third and subsequent courses in a similar manner.

V. FITTING THE OUTER COURSE TILE

- A. In most wall-to-wall installations, the tile in the outer course will have to be cut to fit. Tile may be cut using a heavy-duty utility or carpet knife and a straight edge. A saber saw utilizing a 7-10 TPI wood cutting blade also works well. A saw with a 3-3.5 amp rated motor having a 1" stroke with variable orbital settings will produce the best results. A cutting table used to support the work is required during cutting. A standard shipping pallet works well for this purpose for infield use.
- B. The outer course should then be installed as described in item C above, utilizing the remaining dowel holes. The cut edge should face the wall.

VI. ADHERING THE OUTER COURSE AND RAMPS

- A. If required, ramps can be cut in the same manner as tile. If ramps are used at a corner, each ramp should be miter cut at a 45° angle.
- B. After ramps have been properly cut, ramps and outer tile, which are not contained by walls, should be adhered to the existing floor using E-Grip III adhesive with a 1/16" square notched trowel indoors over substrate. Set tiles and ramps in the adhesive bed. Tiles being set in the adhesive bed should be doweled to the next inner course of tiles, but need not be doweled to each other. Ramps need not be doweled.
- C. For areas where adhering a ramp is not an option you may edge adhere the side heel of the reducer to the side of the tile and/or drill dowel holes in the side heel of the reducer to match the existing dowel holes in the tile.
 - 1. When drilling dowel holes, the holes should be 1/4" in diameter and 1.75" deep.
 - 2. Adhesive should be allowed to cure for 24 hours before walking on the tile.
- D. Your 1" ECOmax installation is now ready for use and will provide years of reliable, low maintenance performance. If you have questions about installation techniques or anything else regarding 1" ECOmax, call Gerbert, Ltd. toll free at 1-877-326-7873.

1" EXTERIOR INSTALLATION

I. GENERAL INFORMATION (1" EXTERIOR INSTALLATION)

NOTE: 1" ECOMax is not recommended for rooftop applications.

- A. 1" ECOMax tile may be installed outdoors over existing asphalt & concrete surfaces using E-Grip III adhesive and a **1/8" square-notched trowel**.
- B. Full adhesion of 1" ECOMax tiles and accessories to the substrates described in the following and in Base Preparation is the only recommended method for outdoor installation of 1" ECOMax.

II. SITE LAYOUT - FULLY ADHERED

- A. Sweep area clear of all dust and loose debris.
- B. Determine a starting point for the first course of tile that best suits the site area. For irregular site configurations, the best starting point is often in the center of the area. This ensures a symmetrical finish for tiles that required cutting along the perimeter. Other installations are best started in a corner or along one edge that represents the length or width dimension of the site.
- C. Mark two points on the base surface at an equal distance from the edge of the installation.
- D. Snap a chalk line through the established points.
- E. Measure the length of the site along the chalk line. Mark a point on the chalk line at half this distance.
- F. Using the 3-4-5 right triangle method or a carpenter's square, snap a chalk line through this point at 90° to the previously established lengthwise course line. These perpendicular reference lines will serve as a guide for laying the first course of tile.

III. ADHERING TILES TO BASE

- A. The following method of installation of 1" ECOMax tiles and accessories may be used over concrete or asphalt. The tiles, accessories, and substrate must be dry before and during the application of adhesive.
- B. Follow the Site Layout instructions to prepare the site area for installation. The tiles, accessories and substrates must be dry before, during, and 24 hours after the application of adhesive.

NOTE: Coverage rates for the E-Grip III adhesive are approximately 60 sq. ft./gal. on concrete and 50 sq. ft./gal. on asphalt using a 1/8" square notch trowel. E-Grip III is available in 2 and 4-gallon pails.

- C. Using a **1/8" square-notched trowel** apply the E-Grip III adhesive slightly wider than the tile being placed. Place tile into the fresh adhesive bed following pre-established course lines. If applicable, place ramps into the fresh adhesive bed in a similar manner.
- D. Allow 24 hours for adhesive to cure before opening area for use.

NOTE: Although ECOMax tiles contain UV-resistant EPDM, an initial ambering of this product in outdoor environments is normal. Tile color will stabilize and return to their initial hue within 2-3 weeks.

NOTE: ECOsurfaces flooring is manufactured from recycled materials and slight variance in shade and color chip dispersion is normal. It is the installer's responsibility to inspect all products to ensure the correct style, thickness, and color. Any moderate to severe discrepancies should be reported immediately before beginning installation.

IV. CUTTING 1" ECOMax TILE AND RAMPS

- A. Avoid leaving a cut edge of a tile exposed to eyesight. To guarantee a finished appearance, any tile that has its factory molded, radiused edge removed for any reason should be backed along that edge using a 1" ECOMax transition ramp, masonry or timber edging unless that edge is to be placed against a wall or other vertical member.
- B. The most accurate cuts in tiles are made using a heavy-duty utility or carpet knife and a straight edge. A saber saw utilizing a 7-10 TPI wood cutting blade also does an acceptable job, especially for radiused or free-form cuts. A saw with a 3-3.5 amp rated motor having a 1" stroke with variable orbital setting will produce the best results. A cutting table used to support the work is required during cutting. A standard shipping pallet works well for infield use.
- C. Tile cuts are typically laid out by referencing dimensions from the edges of the tiles already in position to a wall or other obstruction along or around which the tiles are to fit. These dimensions are then transferred to and laid out on the tile to be cut.
- D. Layout lines are best made using a Sharpie® permanent marking pen, silver grease pencil, paint type marking pen, or carpenter's pencil.
- E. Ramps installed at corners should be miter cut to allow ramps to fit together properly.

2-1/2" INTERIOR & EXTERIOR INSTALLATION

I. GENERAL INFORMATION

- A. 2-1/2" ECOMax may be installed using a variety of installation methods. The most common and secure method is a full-spread adhesion of tiles and accessories to the substrates using E-Grip III, an easy-to-use one part polyurethane adhesive.

NOTE: Dimensional tolerance for tiles is +/- 1/8". From time to time during installation, it may be necessary to measure and hand select tiles to ensure course lines remain straight. Additionally, color tone and shading may vary to the extent that some hand selection is required to maintain maximum uniformity throughout the site.

NOTE: For 2-1/2" ECOMax rooftop and specialty applications, ECORE recommends the use of ECOsurfaces' exclusive fastening system called Quad Blok™. Tiles are adhered to the Quad Blok connector, eliminating potential damage to the roof membrane.

NOTE: ECOsurfaces flooring is manufactured from recycled materials and some variance in shade and color chip dispersion is normal. It is the installer's responsibility to inspect all products to ensure the correct style, thickness, and color. Any visual discrepancies should be reported immediately before beginning installation.

II. SITE LAYOUT

- A. Sweep area clear of all dust and loose debris.
- B. Determine a starting point for the first course of tile to best suit the site area. For irregular site configurations, the best starting point is often in the center. This will ensure a symmetrical finish for tiles that require trimming along the perimeter. Other installations are best started in the corner or along one edge that represents the length or width dimension of the site.
- C. Mark two points on the base surface at an equal distance from the edge of the installation. These points should be located near the opposite ends of the site in the length-wise direction.
- D. Snap a chalk line through the established points. When installing 2-1/2" ECOMax over a geo-textile fabric string lines must be used in place of chalk lines.
- E. Measure the length of the site along the chalk line. Mark a point at half the distance of the site.
- F. Using the 3-4-5 right triangle method, snap a chalk line to form a 90° angle to the previously established length-wise chalk line. These perpendicular reference lines will serve as a guide for laying the first course of tile.

III. FULLY ADHERED INSTALLATION

- A. Follow the site layout instructions to prepare the site area for installation. The tiles, accessories, and substrates must be dry before, during and 24 hours after the application of adhesive.

NOTE: Coverage rates for the E-Grip III adhesive are approximately 60 sq. ft./gal. on concrete and 50 sq. ft./gal. on asphalt using a 1/8" square notch trowel. E-Grip III is available in 2 and 4-gallon pails.

- B. Using a **1/8" square-notched trowel** apply the E-Grip III adhesive out slightly wider than the tile being placed.
- C. Place tiles into the fresh adhesive bed following pre-established course lines. If applicable, place ramps into the fresh adhesive in a similar manner.
- D. Adhesive should be allowed to cure for 24 hours before the tiles are used.


NOTE: Although ECOMax tiles contain UV-resistant EPDM, an initial ambering of this product in outdoor environments is normal. Tile color will stabilize and return to its initial hue within 2-3 weeks.

IV. QUAD BLOK INSTALLATION

NOTE: Installation by means of the Quad Blok system is only recommended for 2-1/2" ECOMax tiles.


- A. Follow the Site Layout instructions to prepare the base for the installation of 2-1/2" ECOMax tiles.
- B. Once chalk lines are established, place the first tile at the intersection of two chalk lines, aligning adjacent edges of the tile with the chalk lines.
- C. Apply a continuous 3/8" diameter bead of E-Grip III adhesive along the center axes of all Quad Blok connectors. Working adhesive time is dependent upon environmental conditions (see figure 2).

Figure 2. Connector detail

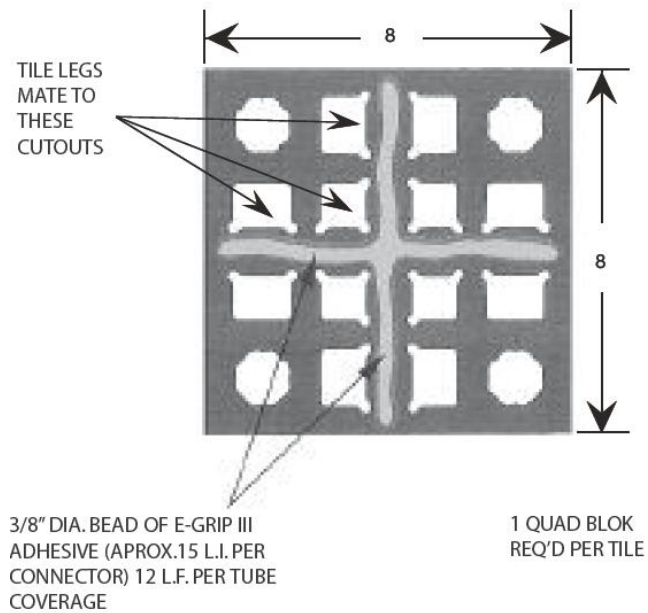

- D. Fit the first tile with four prepared Quad Blok connectors by lifting each tile corner slightly, sliding the connectors under each corner and engaging the four corner legs of each tile with the respective apertures in the Quad Blok. Continue to sequentially lay the tile and to set the Quad Blok connectors along one chalk line until the first course of tile is complete (see figure 1).

Figure 1. Typical tile field placement

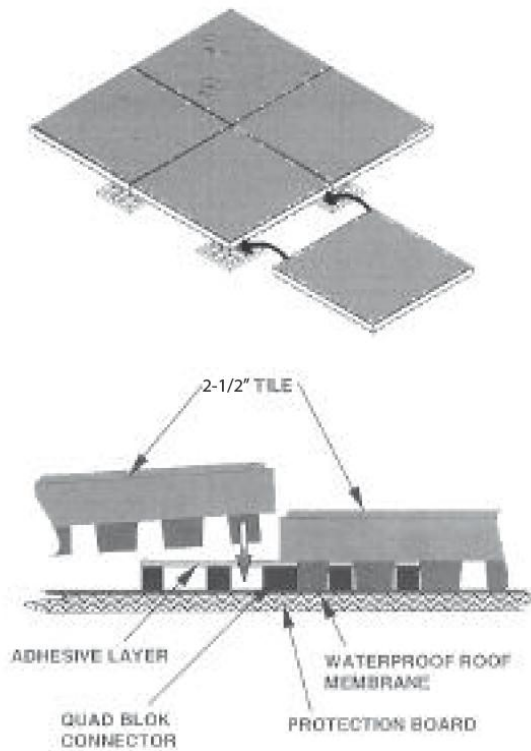

NOTE: In the field, cut the Quad Blok connectors in half to properly secure tile around the perimeter edge of surface area. The most accurate cuts are made using a utility knife and straightedge.

- E. Complete the other three quadrants of the roof deck in a similar fashion.
- F. Depending on manpower availability, one or more quadrants can be worked on simultaneously using the above method.
- G. Allow 24 hours for adhesive to cure before opening area for use.

V. CUTTING 2-1/2" ECOmax TILE AND RAMPS

- A. Avoid leaving a cut edge of a tile exposed to eyesight. To guarantee a finished appearance, any tile that has its factory molded, radiused edge removed for any reason should be backed along that edge using a 2-1/2" ECOmax transition ramp, masonry, or timber edging unless that edge is to be placed against a wall or other vertical member.
- B. The most accurate cuts in tiles are made using a heavy-duty utility or carpet knife and straightedge. A saber saw utilizing a 7-10 TPI wood cutting blade also does an acceptable job, especially for radiused or free-form cuts. A saw with 3-3.5 amps rated motor having a 1" stroke with variable orbital settings will produce the best results. A cutting table used to support the work is required during cutting. A standard shipping pallet works well for infield use.

- C. Tile cuts are normally laid out by referencing dimensions from the edges of tiles already in position. These dimensions are then transferred to and laid out on the tile to be cut.
- D. Layout lines are best made using a Sharpie® permanent marking pen, silver grease pencil, paint type marking pen, or carpenter's pencil.
- E. A lead-in cutting line is extended from the tile edge to the portion to be cut. The lead-in cutting line chosen usually represents the shortest distance from the cutout area to an edge of the tile, or the one that is least noticeable.
- F. Ramps installed at corners should be miter cut to allow ramps to fit together correctly, or use factory molded corner pieces available for 2-1/2" thick ECOMax.

MAINTENANCE

IMPORTANT INFORMATION FOR THE INSTALLER

ECORE recommends Ecore Green Solutions Maintenance Products and Procedures for ECOsurfaces Commercial Flooring.

Proper protection and maintenance of ECOsurfaces post-installation should be specified by the architect/designer. ECOsurfaces. ECOMax products are not pre-coated with a factory finish; therefore, they should not be subject to construction debris and potential damage caused from heavy-duty construction activities.

FLOOR PROTECTION

The specifier should include specification details to protect the floor post installation and until job construction is complete, such as covering the entire floor with paper or other floor covering device (plastic, plywood, etc.) until construction is completed and thorough cleaning and maintenance can be implemented.

ASSIGNMENT OF CLEANING AND MAINTENANCE

The specifier should determine and assign the responsibility for the initial cleaning and finishing. This responsibility should be specifically assigned to either the flooring contractor, general contractor, maintenance contractor, or owner.

PRODUCTS AVAILABLE FOR PURCHASE

ECORE Green Solutions products available from Ecore International.
Call 1-800-322-1923 or visit www.ecoreintl.com.

Steps	Green Products	Dilute	Pads & Brushes
Initial Cleaning	ECORE's E-Cleaner	10 oz./ gal. water	Soft nylon brush or approved pad
Daily Cleaning	ECORE's E-Cleaner	2-4 oz./gal. water	Soft nylon brush, or microfiber mop
Heavy Soil and Restorative Cleaning	ECORE's E-Strip	10 oz./gal. water	Soft Nylon Brush or approved pad

The application rates and concentrations are based on ECORE recommendations. For rates and concentration of other products, Consult the specific manufacturer's instructions.



Broom



Wet Mop



Wet/Dry Vac



Auto Scrubber



Buffer

I. INDOOR MAINTENANCE

A. Initial Cleaning

1. Remove all surface soil, debris, sand and grit by sweeping, dust mopping, or vacuuming with a high CFM vacuum. For large areas, use auto scrubbers to clean floors.
2. Scrub floor with ECORE's recommended E-Cleaner, using a buffer or auto scrubber with a soft nylon brush or an approved purple pad. Avoid flooding the floor.
3. Pick up solution with a wet vacuum, rinse with clean water, picking up the rinse water with a wet vacuum, and allow to dry thoroughly (6-8 hours).

B. Daily/Regular Cleaning

1. Sweep, dust mop, or vacuum floor to remove surface soil, debris, sand, and grit.
2. Damp mop with a microfiber mop or autoscrub using ECORE's approved E-Cleaner low foam cleaner.

C. Restorative Maintenance

1. Sweep and dry vacuum floor thoroughly.
2. Heavy scrub floor with ECORE's E-Strip. This cleaning may be performed with an auto-scrubber or rotary scrubber (Contact ECORE for pad recommendations).
3. Vacuum soiled solution with a wet/dry vacuum.
4. Rinse with clean water.
5. Pick up solution with wet vacuum.
6. Allow floor to thoroughly dry.

D. Heavy Soil

1. Remove as much surface soil, debris, sand, and grit as possible by sweeping, dust mopping or vacuuming.
2. Scrub floor with ECORE’s recommended E Cleaner, using a buffer or auto scrubber with a recommended pad.
3. Pick up solution with a wet vacuum, rinse with clean water and allow to dry thoroughly (6-8 hours).

II. OUTDOOR MAINTENANCE

A. Initial Cleaning

1. Tile should be swept thoroughly or dry vacuumed using a heavy-duty shop vacuum.
2. As an alternative, some outdoor sites may be blown clean with a gas powered leaf blower.
3. Aggressively scrub the floor with a pH neutral detergent and a cold water pressure washing unit.
4. Vacuum soiled solution with a wet/dry vacuum or use a squeegee to remove surface water.
5. Allow site to dry thoroughly.

B. Daily/Regular Cleaning

1. Sweep, dust mop, or vacuum floor to remove surface soil and debris.
2. Hose down the tiles with clean water.
3. Allow to dry.

C. Interim Maintenance

1. Sweep, dry vacuum, or blow the site clean.
2. Aggressively scrub the floor with a pH neutral detergent and a cold water pressure washing unit.
3. Vacuum soiled solution with a wet/dry vacuum or use a squeegee to remove surface water.
4. Allow site to dry thoroughly.
5. Repeat if necessary.

Power Scrubber	17” rotary floor buffer with mounted detergent tank and feed line to the brush. A circular brush attachment should be used.
Auto Scrubber	Unit with clear hot water rinse feature and wet vacuum pickup. Wand extension and 10 to 14” pickup nozzle is recommended.
Cold Water Pressure Washing Unit	<ul style="list-style-type: none"> • Power Unit: 10-13 hp gasoline engine • Capacity: 3-4 gallons per min. • Pressure: 1500 psi • Keep tip 18” from tile surface. Recommended 40° wash nozzle. • Extensions for trigger gun and quick disconnect fittings are recommended
Wet/Dry Shop Vacuum Unit	<ul style="list-style-type: none"> • Power Unit: Minimum 1.7 hp commercial unit, 7.0 amp, 120 vlt A.C., 50/60 Hz two-stage bypass motor. • Tank Capacity: 10-25 gallon, lined stainless steel or polypropylene. • Accessories: Extension wand with a 6 to 12” pickup nozzle, crevice tool and heavy-duty extension cord.

Detergent	ECORE Green Solutions, E-Cleaner
------------------	----------------------------------

WARRANTY

All ECORE International rubber flooring is guaranteed by ECORE International to be free from manufacturing defects on both material and workmanship. If such a defect is discovered, the customer must notify ECORE either through the contracting installer, distributor, or directly. If found to be defective within five years under normal non-abusive conditions, the sole remedy against the seller will be the replacement or repair of the defective goods, or at the seller’s option, credit may be issued not exceeding the selling price of the defective goods.

ECOsurfaces warranty shall not cover dissatisfaction due to improper installation, damage from improper maintenance or usage, or general misuse, including and without limitation: burns, cuts, tears, scratches, scuffs, damage from rolling loads, damage from cleaning products not recommended by ECORE, slight shade variations or shade variations due to exposure to direct sunlight, or differences in color between samples or photographs and actual flooring.

Excluded from Warranty

These warranties do not apply to the following:

1. The exact matching of shade, color, or mottling.
2. Any express or implied promise made by any salesman or representative.
3. Tears, burns, cuts, or damage due to improper installation, improper use, or improper cleaning agents or maintenance methods.
4. Wear from chairs or other furniture without proper floor protectors will void the warranty. Care should be taken to protect the flooring from damage by using good quality protective feet for chairs, tables, and other furniture. Chair mats may be required under chairs with casters/wheels.
5. Labor costs for installation of original or replacement material.
6. Sale of “Seconds,” “Off Goods,” or other irregular (non-first-quality) flooring materials. With respect to “Seconds” or “Off Goods,” such are sold “as is,” and ECOsurfaces makes no warranties whatsoever, express or implied with respect thereto, including warranties of merchantability or fitness for a particular purpose.
7. Problems caused by moisture, hydrostatic pressure, or alkali in the sub-floor.
8. Problems caused by uses, maintenance, and installation that are contrary to ECOsurfaces specifications, recommendations or instructions.
9. Material installed with obvious defects.
10. Damage to flooring products from high heels or spike heels.
11. Damage to flooring products from rubber mats or rubber backed mats.
12. Installation of ECOsurfaces products with adhesives other than those recommended by ECOsurfaces.
13. Fading and/or discoloration resulting from heavy sunlight penetration and ultraviolet ray exposure from direct or glass-filtered sunlight.
14. Material that is not installed and maintained as recommended by ECOsurfaces.
15. Damage to flooring products from pallet jack and tow-motor traffic.
16. Environments where the product will be exposed to animal fats, vegetable oils, grease or petroleum based materials. (i.e.: commercial kitchens or auto repair facilities.)
17. Premature wear and deterioration from spikes and skate blade exposure.
18. Differences in color between products and photography.
19. Embossing/density deviations between product and samples, photography.

These warranties are in lieu of any other warranty expressed or implied. ECOsurfaces shall not be liable for any incidental or consequential damages which may result from a defect. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. These warranties give you specific rights, and you may also have rights which may vary from state to state. To know what your legal rights are in your state, consult your local or state Consumer Affairs Office or your State Attorney General.

For complete and latest warranty information for products within the ECOsurfaces collection, please see www.ecosurfaces.com.



1-877-326-7873 • www.ecosurfaces.com

Distributed by:



Gerbert, Ltd.

P.O. Box 4944
Lancaster, PA 17604-4944

Manufactured by:



715 Fountain Avenue
Lancaster, PA 17601

©2011 All designs and colors are copyrighted by ECORE Intl. ECOSurfaces and ECOMax are registered trademarks of ECORE Intl. E-Grip and Quad Blok are trademarks of ECORE Intl.