


Rx Collection

Cosmos | Crossings | Forest | Infinity | Strait

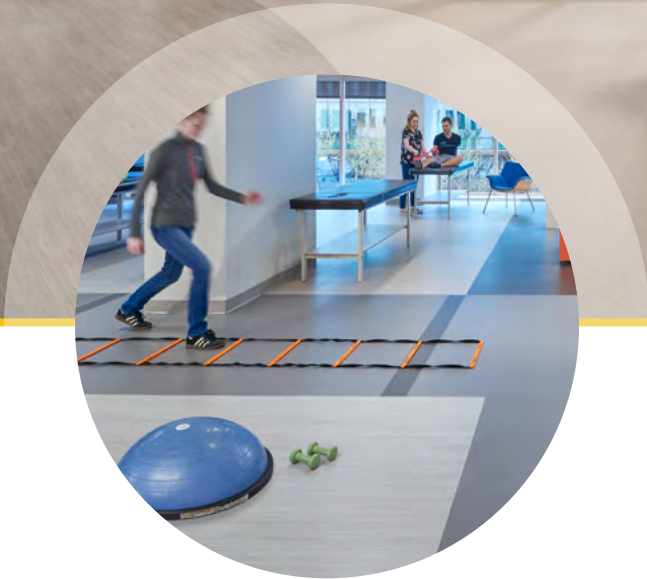

The vinyl surfaces in the Rx Collection were developed to meet the performance and aesthetic requirements of a space. These products provide a unique solution, featuring a vulcanized composition rubber backing fusion-bonded to a contemporary heterogeneous vinyl sheet. Available as standard rolls, these products offer seamless, easy-to-maintain surfaces that reduce the risk of injury associated with falls, offer sound control, and provide comfort underfoot.

Markets

- PT/OT
- Healthcare
- Hospitality
- Education
- Corporate
- Multifamily
- Public Buildings
- Fitness
- Retail
- Senior Care

Benefits

- Hygienic because of heatwelded installation
- Ergonomic
- Quiet
- Low maintenance

Applications

- Medical, Acute Care, Labs
- Therapy & Rehab
- Offices
- Common Areas
- Fitness
- Group Exercise
- Multipurpose Courts
- Selectorized Strength
- Cardio
- Restrooms & Locker Rooms
- K-12 / Higher Education
- Childcare / Playzones

Product Information

Nominal Dimensions:

Available as a standard in rolls. Talk to your local agent to determine availability, pricing, minimums, and lead times.



Rolls:
6' (1.83 m) x 30' (9.14 m)
Thickness: 7mm nominal
(2 mm surface layer + 5 mm VCR base layer)

[View products and colors](#)

Visual Options:

Cosmos Rx - solid colors with pearlescent fragments, available in 6 colors.
Crossings Rx - contemporary textile pattern available in 8 colors.
Forest Rx - true wood visual, available in 17 colors.
Infinity Rx - linear pattern, available in 9 colors.
Strait Rx - linen appearance, available in 6 colors.

Technical Details

Performance Criteria	Test Standard	Typical Results
Recovery after Static Load (@400psi)	ASTM F970 Modified	0.004"
Recovery after Static Load (@1000psi after 96 hrs)	ASTM F970 Modified	0.004"
Coefficient of Friction	ASTM D2047	>0.6
FloorScore	CA01350	Certified
Flammability - Critical Radiant Flux	ASTM E648	Class I
Abrasion Resistance	ASTM D3389	Pass
Dynamic Rolling Load	ASTM F2753	No damage, No change (@10,000 cycles)
Vertical Deformation	ASTM F2772	Pass
Surface Effect Slip Resistance	ASTM F2772	Pass
Ball Rebound	ASTM F2772	Pass
Force Reduction	ASTM F2772	Class I
Impact Insulation Class (IIC)*	ASTM E492	52
Delta IIC*	ASTM E2179	23
Floor Impact Sound	ASTM E3133	77dBA
Sound Transmission Class (STC)*	ASTM E90	56

* Tested on a 6" concrete slab with no ceiling.

THE NRG FACTOR

NRG

11.5%

Force Reduction

Absorption of impact energy

72.0%

Energy Restitution

Useful return of impact energy

Safety

Ergonomics

Acoustics